


REFERENCE TABLE:

WWC P/N.	PRAT P/N	L±T(mm)	W±T(mm)	WEIGHT(g)
AACY1-872-01220		1220±25	130~140	77/pcs
AACY1-872-01830		1830±30	130~140	
AACY1-872-03050		3050±50	140~150	166/pcs
AACY1-872-06100		6100±75	140~150	315/pcs

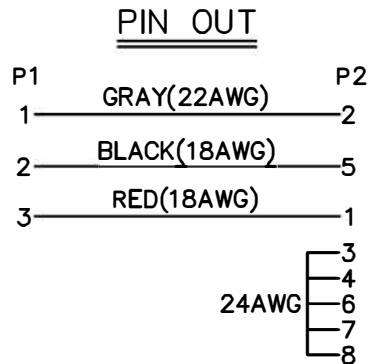

11 MINI TIE	PE/BLACK IN COLOR	2
10 CABLE SPEC	CABLE SPEC DETAIL SEE CHART A	1
9 2*4P HOUSING-OUTER MOLD	MOLDING PVC/BLACK IN COLOR	1
8 2*4P HOUSING-INNER MOLD	MOLDING PE/NATURAL IN COLOR	1
7 2*4P HOUSING-INSULATOR	PBT/BLACK UL94V-0 (P/N: 43645)	1
6 2*4P HOUSING-TERMINAL	PHOSPHOR BRONZE/TIN PLATED	8
5 3P HOUSING-OUTER MOLD	MOLDING PVC/BLACK IN COLOR	1
4 3P HOUSING-INNER MOLD	MOLDING PE/NATURAL IN COLOR	1
3 3P HOUSING-THUMB SCREW	STEEL/NICKEL PLATED	1
2 3P HOUSING-INSULATOR	POLYAMIDE/GREEN UL94V-0 (Pitch 5.00mm)	1
1 3P HOUSING-TERMINAL	PHOSPHOR BRONZE/TIN PLATED,	3

T-conn PN.: 99-00843-B054-A

NO.	PARTS NAME	STANDARD SPECIFICATION	Q'TY	SUPPLIER
-----	------------	------------------------	------	----------

MATERIAL LIST

DESCRIPTION	
3PIN HOUSING TO 2*4PIN HOUSING MOLDING TYPE	

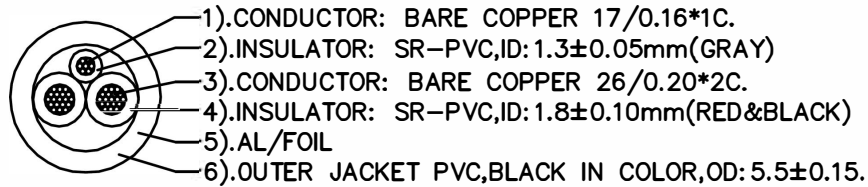


CHART A

NOTES:

1.CABLE SPECIFICATION: UL2464 18AWG*2C+22AWG*1C.
 (26/0.20BC*2C+17/0.16BC*1C+AL/FOIL)*1C.

OUTER JACKET PVC,BLACK IN COLOR,OD:5.5±0.15.

PRINT WORD: " E198848-D (UL) CMX Outdoor – CMR 75°C 1Cx22AWG/2Cx18AWG
 E124763-D AWM 2464 80°C 300V VW-1 CYBERPOWER".


2.ELECTRICAL TEST

<1>.100% OPEN SHORT & MISS WIRE TEST

<2>.INSULATION RESISTANCE: DC 400V 50M ohm MIN

<3>.CONDUCTOR RESISTANCE: 3 ohm MAX.

3.PACKING:1PCS/PE BAG.



HANK CHART

<p>DESCRIPTION 3PIN HOUSING TO 2*4PIN HOUSING MOLDING TYPE</p>	
---	---