
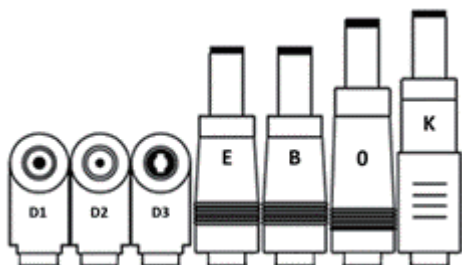


HIGH OUTPUT AC POWER ADAPTER

CPUAC3000

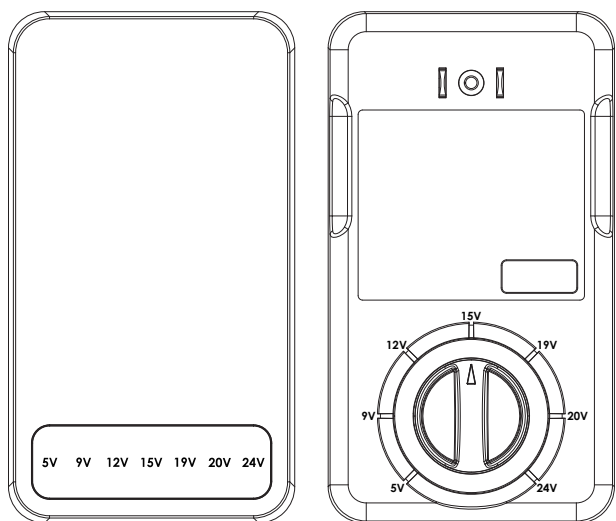


WARNING

Identifying the correct voltage and polarity settings and adjusting the product is the user's responsibility.

- This adapter can only be used with a 100 - 240 Vac power outlet. Follow all necessary safety precautions.
- Not recommended for use by children.
- Failure to adjust the adapter settings to match your connected device's requirements can result in damage to the device.
- This adapter is only for use with devices with positive polarity, If your device has negative polarity, do NOT use this adapter.

TIP SELECTION AND USE

1. Carefully test the tips by gently inserting them into the DC jack on your device. Choose a tip that fits snugly, but do not force it to fit.
2. Connect the selected tip to the end of the adapter's output cord. Push it on tightly.
3. If your device has positive polarity, connect the chosen tip to the adapter's connector.
4. If your device has negative polarity, do NOT use this adapter.



DETACHABLE TIPS

STRAIGHT:

- 7.9 (OD) x 5.6 (ID) Yellow K
- 6.3 (OD) x 3.0 (ID) Green B
- 5.5 (OD) x 1.7 (ID) Yellow E
- 4.5 (OD) x 3.0 (ID) Blue O

RIGHT ANGLE (for use with a variety of soundbars):

- 6.3 (OD) x 4.7 (ID) Black D1
- 6.5 (OD) x 1.4 (ID) Black D2
- 5.5 (OD) x 2.5 (ID) Blue D3

OD = Outer Diameter, ID = Inner Diameter, measurement in mm

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information
- Product warranty

SETTING UP YOUR ADAPTER

1. Identify the correct adapter plug tip that fits into the device you wish to power.
2. Check the input requirements needed for your device, then select the proper voltage on your adapter by turning the selector knob to the desired setting. Do not use this adapter if your device's required voltage is not between 5 and 24 V DC.
3. Set the adapter's voltage dial to the required voltage for the device you are powering. The voltage required will typically be identified in either the user manual, on the input specifications on the device itself, or on its old adapter. If you cannot determine the proper voltage, contact the manufacturer of the device. Using an incorrect voltage can damage the device.
4. Check the polarity of the device you are connecting the power adapter to. If your device has a positive polarity, connect the chosen tip to the adapter's connector. If your device has negative polarity, do NOT use this adapter to power your device.
5. Plug the adapter cord into the device then plug the adapter into a standard 120V outlet. If the device does not function, unplug the adapter from the outlet immediately. Check to make sure the voltage setting is correct, and positive polarity is required.

△WARNING: This product can expose you to chemicals including bisphenol A (BPA) and styrene (ABS), which is known to the State of California to cause reproductive harm and cancer. For more information, go to www.P65Warnings.ca.gov.

TROUBLESHOOTING

If the adapter's indicator light is flashing:

- Immediately unplug the adapter.
- Check the polarity of your device. If your device has negative polarity, do NOT use this adapter.
- Make sure that your device requires less than the 3,000 mA (3 A) at 5 V-15 V and less than the 2,000 mA (2 A) at 19 V-24 V.
- Make sure that the voltage selector dial on the power adapter is set to the correct voltage.
- Make sure that you have selected the correct tip.

TECHNICAL SUPPORT

Visit: CyberPowerSystems.com/support

Toll-Free: 1-877-297-6937

© 2024 Cyber Power Systems (USA), Inc. All rights reserved. All other trademarks are the property of their respective owners.

FC CONFORMANCE APPROVALS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against

harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment on and off, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Cyber Power Systems (USA), Inc.

4241 12th Avenue East, Suite 400 | Shakopee, MN 55379

CyberPowerSystems.com