


7-OUTLET SURGE PROTECTOR

CSP706T / CSP708T

USER MANUAL

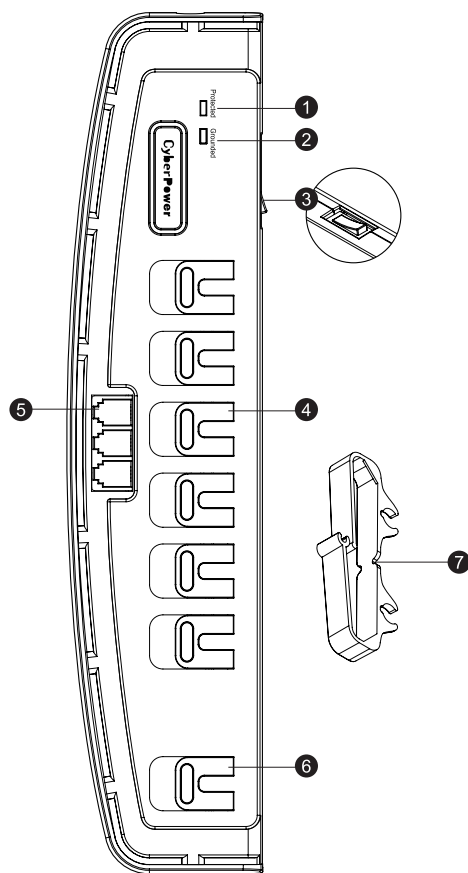

FEATURES

- 1. Protected LED Indicator**
Illuminated when the surge protection feature is working properly.
- 2. Grounded LED Indicator**
Illuminated when a properly grounded AC outlet is detected.
- 3. ON/OFF Reset Control Switch and Circuit Breaker**
Controls power to all outlets. The switch is also a 15A breaker. When an overload occurs, it will automatically switch off. To resume operation, ensure the overload condition is removed and reset the surge protector by switching the unit ON.
- 4. Safety Covers**
All outlets on this surge protector include safety covers. To ensure the safety of children and to avoid electric shock and damage from a high-dust environment, slide the plastic outlet cover over outlets that are not used.
- 5. Surge Protected Data Line Connections**
To protect your equipment from surge along phones/fax/modems lines:
A. Connect the phone line from wall outlet into the "In" port.
B. Connect the phones/fax/modems line(s) in the "Out" ports.
- 6. One Wide-Spaced Outlet**
Easily plug in large chargers without interfering with the other outlets.
- 7. Cord Gathering Bracket**
Keeps power cords neat and organized.

CAUTION

TO REDUCE THE RISK OF ELECTRIC SHOCK:

Use only in dry locations and only indoors.

DO NOT plug into another relocatable power tap.

DO NOT "daisy chain" surge protectors.

DO NOT use with any aquarium equipment.

DO NOT use if properly grounded outlets are not available.

DO NOT install this device if there is less than 10 meters (30 feet) of wire between the electrical outlet and electrical service panel.

DO NOT use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

FOR MORE INFORMATION

Visit CyberPowerSystems.com for more information regarding:

- Product information and certifications
- Product warranty
- Connected equipment guarantee

© 2022 Cyber Power Systems (USA), Inc. All rights reserved. All other trademarks are the property of their respective owners.



CONFORMANCE APPROVALS

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against

harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

WARNING: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

SPECIFICATIONS

Model Number:	CSP706T / CSP708T
Outlets:	7 - 1 Wide-Spaced Outlet
Surge Protection:	1,650 Joules
Electrical Rating:	125V / 15A / 1,875W
UL Clamping Voltage:	UL 1449 3rd 400V (H-N), 500V (H-G, N-G)
Maximum Peak Current:	75,000 A
3 AC Lines Protected:	H-N: 45,000 A H-G: 15,000 A N-G: 15,000 A (The maximum surge possible on household wiring is 6,000 volts)
Response Time:	Less than 1 nanosecond
Attenuation:	Up to 43dB
Telecommunications Protection:	RJ11 1 in / 2 out
Circuit Breaker:	Resettable 15 Amp
EMI/RFI Filtration:	150 kHz to 100 MHz

⚠ **WARNING:** This product can expose you to chemicals including bisphenol A (BPA) and styrene (ABS), which is known to the State of California to cause reproductive harm and cancer. For more information, go to www.P65Warnings.ca.gov.

TROUBLESHOOTING

If the ON/OFF is switched off, the 15 AMP circuit breaker may have tripped. Examine your connected equipment and remove the device that is overloading the circuit. Then, position the ON/OFF switch back to RESET.

If the Grounded indicator does not light when you plug in the surge protector, move the surge protector to a different grounded three-prong AC outlet. If the surge protector proves to be working properly, your outlets may not be properly grounded and need to be repaired by a professional electrician.

If the Protected indicator does not light, the surge protector's AC line is no longer protected from surges. Replace the surge protector. The surge protector may have received a power surge or spike beyond its specified limits that might have overloaded the protection circuitry and made it inactive. The surge protector absorbed enough of the surge to protect your connected equipment, but it will not protect against future surges and spikes.

Cyber Power Systems (USA), Inc.

4241 12th Avenue East, Suite 400 | Shakopee, MN 55379

CyberPowerSystems.com