

# CyberPower®

Surge Protection  
Multi-Pack

## MP1070WS


### USER MANUAL

© 2020 Cyber Power Systems (USA), Inc. All rights reserved.  
All other trademarks are the property of their respective owners.

[CyberPowerSystems.com](http://CyberPowerSystems.com)

## 3-Outlet Extension Cord with 2 USB Ports

### P303U

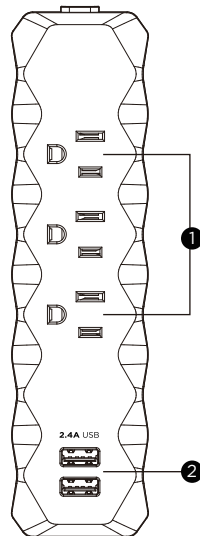

#### EXTENSION CORD INSTRUCTIONS

1. Plug the extension cord into a standard grounding wall receptacle by fully inserting the plug and ensure that there are no exposed conductors.
2. Make sure the electronic equipment is turned off before plugging into the extension cord outlets. Do not use extension cords to connect equipment to the extension cord.

#### FEATURES

1. Standard Grounded Outlets (3)
2. USB Charging Ports (2)

#### SPECIFICATIONS



- Model Number: P303U
- Outlets: Standard Grounded Outlets (3), USB Charging Ports (2)
- Surge Protection: 350 Joules
- Electrical Rating: 125 V/13 A/1625 W/60 Hz
- USB Charging Output: 5 V/2.4A shared
- UL Clamping Voltage: UL 1449 4th/900 V (L-N)

#### CAUTION

**TO REDUCE THE RISK OF ELECTRIC SHOCK** - Use only in dry locations and only indoors. **DO NOT** plug into another relocatable power tap. **DO NOT** "daisy chain" extension cords. **DO NOT** use with any aquarium equipment. **DO NOT** use if properly grounded outlets are not available. **DO NOT** install this device if there is not at least 10 meters (30 feet) or more of wire between the electrical outlet and electrical service panel. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but will maintain power to the load - now unprotected. If this situation is undesirable for the application, follow the manufacturer's instructions for replacing the device.

# 2-Outlet Surge Protector

## P2WU

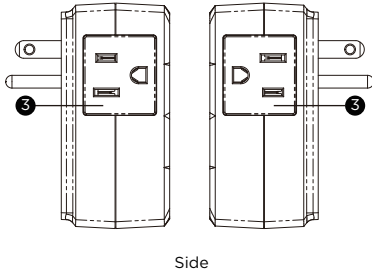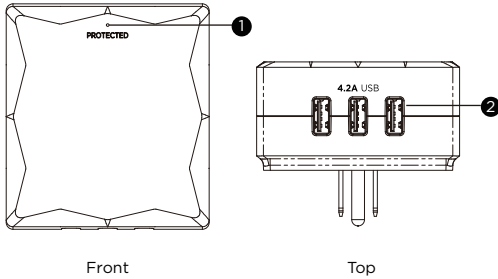

### FEATURES

1. Surge Protected Indicator  
Illuminated when the surge protection feature is working properly.
2. USB Charging Ports (3)
3. Side-Facing Standard Grounded Outlets (2)

### SPECIFICATIONS

- Model Number: P2WU
- Outlets: Standard Grounded Outlets (2), USB Charging Ports (3)
- USB Charging Output: 5 V/4.2A total
- Surge Protection: 500 Joules
- Electrical Rating: 125 V/15 A/1875 W
- UL Clamping Voltage: UL 1449 4th/800 V (L-N)
- Maximum Peak Current: 15,000 A
- AC Lines Protected: L-N: 15,000 A
- Response Time: Less than 1 nanosecond

### CAUTION

**TO REDUCE THE RISK OF ELECTRIC SHOCK** - Use only in dry locations and only indoors. **DO NOT** plug into another relocatable power tap. **DO NOT** "daisy chain" surge protectors. **DO NOT** use with any aquarium equipment. **DO NOT** use if properly grounded outlets are not available. **DO NOT** install this device if there is less than 10 meters (30 feet) or more of wire between the electrical outlet and electrical service panel. **DO NOT** use for medical or life support equipment. This device features an internal protection that will disconnect the surge protective component at the end of its useful life, but it will maintain unprotected power to the load.

### TROUBLESHOOTING

- If the protected indicator does not light, the surge protector's AC lines are no longer protected from surge. The surge protector may have received a power surge or spike beyond its specified limits that overloaded the protection circuitry and rendered it inactive. The surge protector has protected your connected equipment as designed, but it will not protect against future surges, and spikes. It should be replaced.

### TECHNICAL SUPPORT

Please contact our Tech Support Department with installation, troubleshooting, or general product questions.

- Phone: 1-877-297-6937
- Email: [tech@cpsww.com](mailto:tech@cpsww.com)
- Hours of Operation: Monday - Friday 7:00am - 6:00pm CST

### LIFETIME LIMITED WARRANTY

\$50,000 Connected Equipment Guarantee

For warranty and connected equipment guarantee information, please visit [CyberPowerSystems.com](http://CyberPowerSystems.com)

### PRODUCT REGISTRATION

Prompt product registration assures coverage under the limited warranty, and also allows the opportunity of notifications for product enhancements, upgrades, and other announcements. Registration is quick and easy. Go to the Product Registration Page at [CyberPowerSystems.com/registration](http://CyberPowerSystems.com/registration).

### CONTACT INFORMATION

Cyber Power Systems (USA), Inc.

4241 12th Avenue East, Suite 400

Shakopee, MN 55379

Toll-free: 1-877-297-6937 | [CyberPowerSystems.com](http://CyberPowerSystems.com)

### CONFORMANCE APPROVALS



This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment "off" and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

**WARNING:** Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**WARNING:** This product can expose you to chemicals including Styrene, which are known to the State of California to cause cancer, and Bisphenol A (BPA), which are known to the State of California to cause birth defects or other reproductive harm.

For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



Please join CyberPower in caring for the environment by recycling.



This device is manufactured using environmentally-safe procedures in compliance with the Restriction of Hazardous Substances (RoHS) directive.



UL Listed to U.S. and Canadian Safety Standards UL 1449. This product is listed to applicable U.S. and Canadian safety standards by Underwriters Laboratories Inc.

