

PIN OUT


7P/Housing		MD 9Pin Female
P1		P2
1	RED	1+2
2	BLACK	8+9
3	GREEN	3
4	GRAY	4
5	BROWN	5
6	BLUE	6
7	ORANGE	7

13	PE BAG	MEAS:200*150*0.04mm	1	
12	MINI TIE	PE/WHITE IN COLOR	1	
11	CABLE SPEC	CABLE SPEC DETAIL SEE CHART A	1	
10	MD 9PIN/F-DUST COVER	PET/TRANSPARENT IN COLOR	1	
9	MD 9PIN/F-OUTER MOLD	OUTER MOLDING,45P PVC,GRAY IN COLOR	1	
8	MD 9PIN/F-INNER MOLD	MOLDING PE/NATURAL IN COLOR	1	
7	MD 9PIN/F-SHELL	BRASS/NICKEL PLATED	1	
6	MD 9PIN/F-INSULATOR	P.B.T/BLACK IN COLOR	1	
5	MD 9PIN/F-CONTACT	BRASS/PIN NICKEL PLATED, SOLDER TYPE	9	
4	7P HOUSING/M-OUTER MOLD	MOLDING PVC/GRAY IN COLOR	1	
3	7P HOUSING/M-INNER MOLD	MOLDING PE/NATURAL IN COLOR	1	
2	7P HOUSING/M-INSULATOR	PBT/GRAY UL94V-0	1	
1	7P HOUSING/M-CONTACT	PHOSPHOR BRONZE/TIN PLATED;SOLDER TYPE	7	
NO.	PARTS NAME	STANDARD SPECIFICATION	Q'TY	SUPPLIER

MATERIAL LIST

DESCRIPTION
7P HOUSING TO MD 9PIN FEMALE (MOLDING TYPE)

CyberPower®

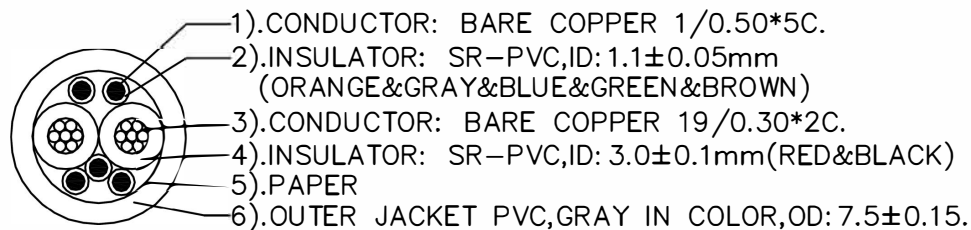CHART A**NOTES:**

1.CABLE SPECIFICATION: UL2464 16AWG*2C+24AWG*5C.
 (19/0.30BC*2C+1/0.50BC*5C+PAPER)*1C.
 OUTER JACKET PVC,GRAY IN COLOR,OD: 7.5±0.15.


2.ELECTRICAL TEST

- <1>.100% OPEN SHORT & MISS WIRE TEST
 <2>.INSULATION RESISTANCE: DC 400V 50M ohm MIN
 <3>.CONDUCTOR RESISTANCE: 3 ohm MAX

3.INSERTION/PULL OUT TEST:

- <1>.PLUG (INSERTION/PULLING FORCE)BY 14 POUNDS MORE.

4.PACKING: 1PC/PE BAG+WHITE CARTON.


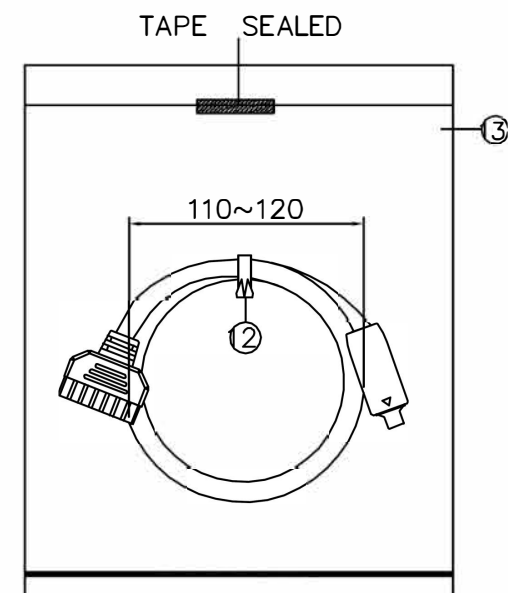


1PC EACH BAG
HANK CHART






DESCRIPTION
 7P HOUSING TO MD 9PIN FEMALE
 (MOLDING TYPE)

CyberPower®

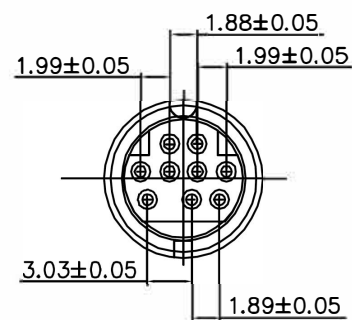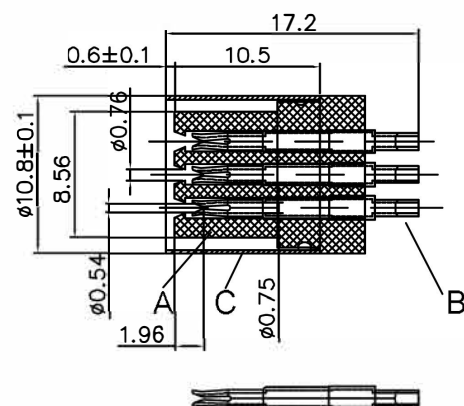

DESCRIPTION
7P HOUSING MALE
MOLDING TYPE

CyberPower®

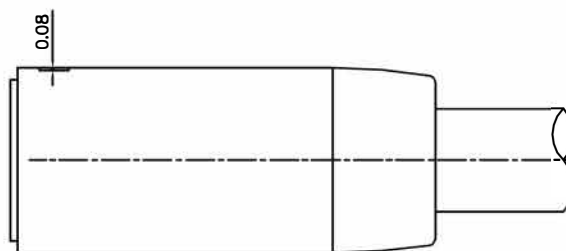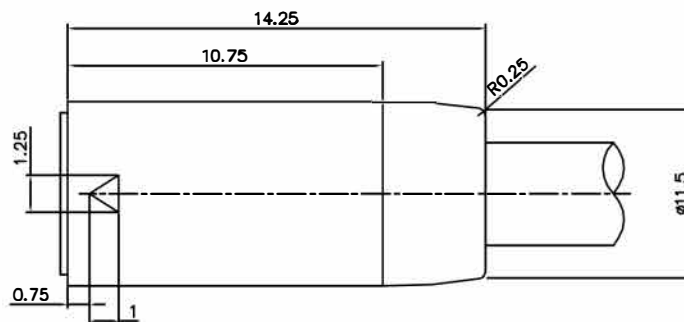

TOLERANCE:

X ± 0.2
.X ± 0.1
.XX ± 0.05

DESCRIPTION
7P HOUSING MALE
MOLDING TYPE

CyberPower®

MF101-500□□EV

RoHS
Compliant






□□ : Poles

500 : Pitch 5.00mm


101 : Standard

MF : Type

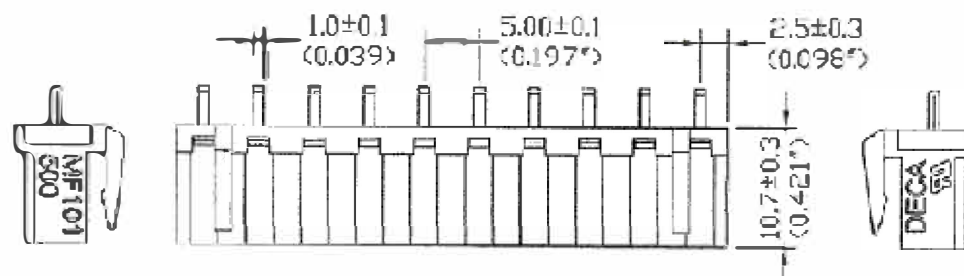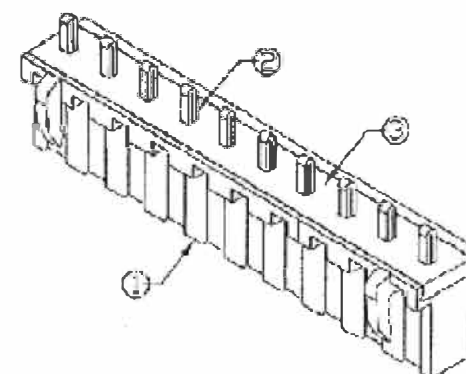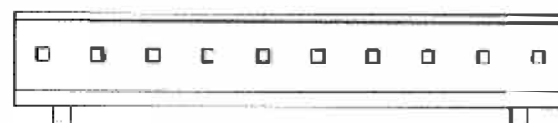

DESCRIPTION
7P HOUSING MALE

CyberPower®

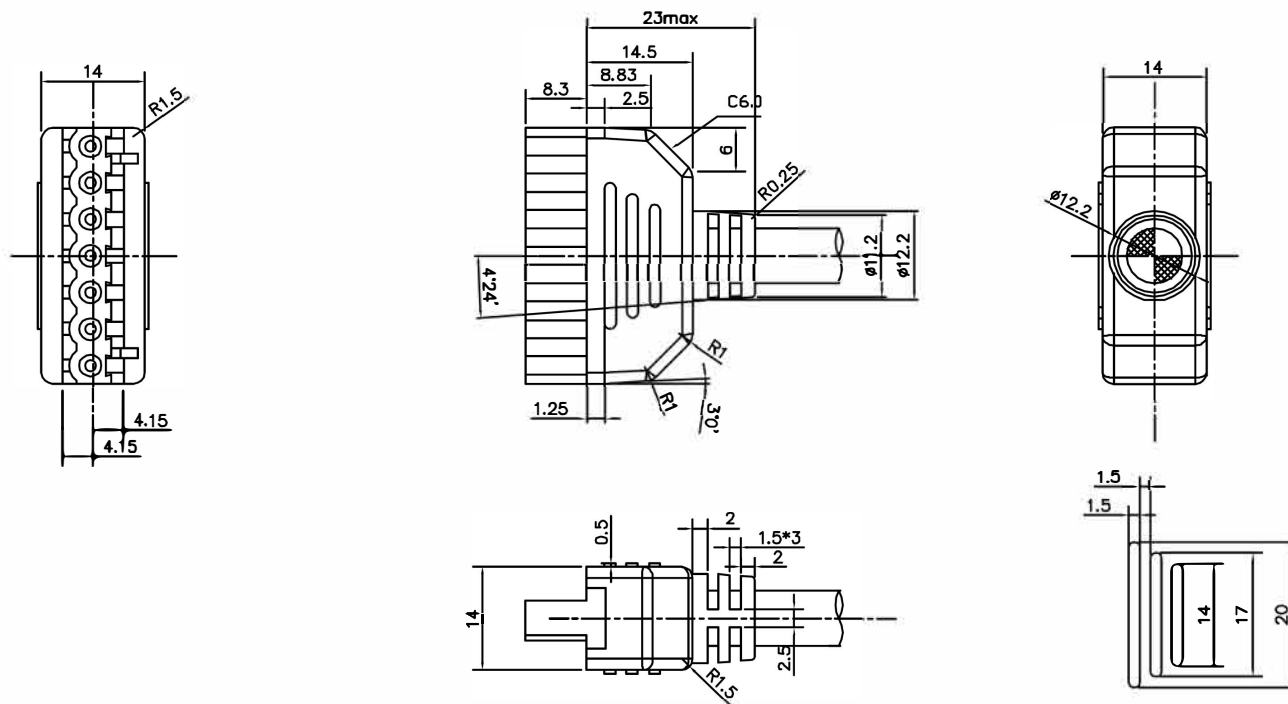

TOLERANCE:

X ±0.2
.X ±0.1
.XX ±0.05

DESCRIPTION
7P HOUSING MALE
MOLDING TYPE

CyberPower®