

PIN OUT

MD 9P/M		7P/Housing
P1		P2
1+2	RED	1
8+9	BLACK	2
3	GREEN	3
4	GRAY	4
5	BROWN	5
6	BLUE	6
7	ORANGE	7

12	MINI TIE	PE/BLACK IN COLOR	2	
11	CABLE SPEC	CABLE SPEC DETAIL SEE CHART A	1	
10	7P HOUSING/M-OUTER MOLD	MOLDING PVC/BLACK IN COLOR	1	
9	7P HOUSING/M-INNER MOLD	MOLDING PE/NATURAL IN COLOR	1	
8	7P HOUSING/M-INSULATOR	PBT/GRAY UL94V-0	1	
7	7P HOUSING/M-CONTACT	PHOSPHOR BRONZE/TIN PLATED;SOLDER TYPE	7	
6	MD 9PIN/M-DUST COVER	PET/TRANSPARENT IN COLOR	1	
5	MD 9PIN/M-OUTER MOLD	OUTER MOLDING,PVC/BLACK IN COLOR	1	
4	MD 9PIN/M-INNER MOLD	MOLDING PE/NATURAL IN COLOR	1	
3	MD 9PIN/M-SHELL	BRASS/NICKEL PLATED	1	
2	MD 9PIN/M-INSULATOR	P.B.T/BLACK IN COLOR	1	
1	MD 9PIN/M-CONTACT	BRASS/PIN NICKEL PLATED, SOLDER TYPE	9	
NO.	PARTS NAME	STANDARD SPECIFICATION	Q'TY	SUPPLIER

MATERIAL LIST


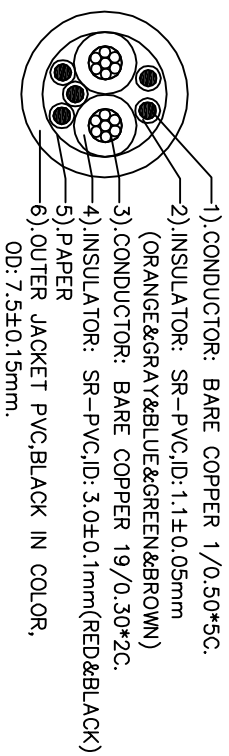


CHART A

Model	CyberPower PN	LE T	WE T
CBL7PINBUL-002-BLK-CM	1MB-0000036-01G	610±20	110~120
CBL7PINBUL-004-BLK-CM	1MB-0000037-01G	1220±25	120~130
CBL7PINBUL-006-BLK-CM	1MB-0000038-01G	1830±30	140~150
CBL7PINBUL-010-BLK-CM	1MB-0000039-01G	3050±50	
CBL7PINBUL-020-BLK-CM	1MB-0000040-01G	6100±75	
CBL7PINBUL-030-BLK-CM	1MB-0000043-01G	9150±100	160~170
CBL7PINBUL-050-BLK-CM	1MB-0000044-01G	15250±150	

**NOTES:**

1. CABLE SPECIFICATION: UL2464 16AWG\*2C+24AWG\*5C.  
(19/0.30BC\*2C+1/0.50BC\*5C+PAPER)\*1C.  
OUTER JACKET PVC, BLACK IN COLOR, OD: 7.5±0.15mm.  
PRINT WORD: " E198848-D (UL) CMR - CMX 75 5Cx24AWG/2Cx16AWG E124763-D AWM
2. ELECTRICAL TEST  
2464 80 300V VW-1 CYBERPOWER".
3. ELECTRICAL TEST  
<1>.100% OPEN SHORT & MISS WIRE TEST  
<2>.INSULATION RESISTANCE: DC 400V 50M ohm MIN  
<3>.CONDUCTOR RESISTANCE: 3 ohm MAX
3. INSERTION/PULL OUT TEST:  
<1>.PLUG (INSERTION/PULLING FORCE)BY 7.2±0.8KG
4. PACKING: 1PC/PE BAG+WHITE CARTON.

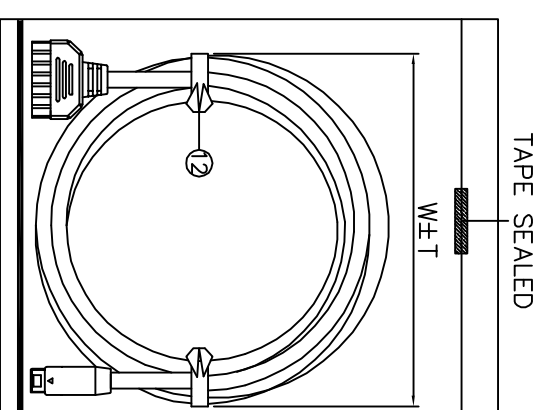

1PC EACH BAG  
HANK CHART

**CyberPower®**