




# CSP100R APPLIANCE SURGE PROTECTOR

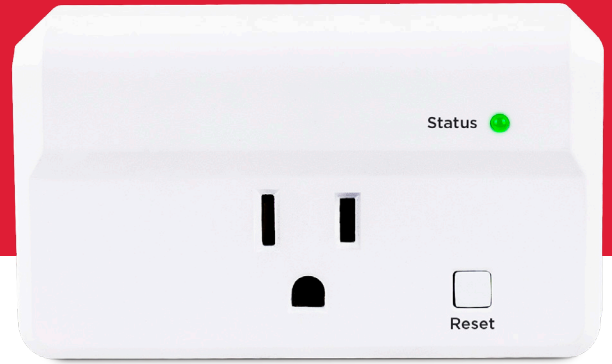

Protects refrigerators and other household appliances from damage caused by power spikes and surges

The CSP100R Appliance Surge Wall-Tap guards common household electronics and appliances from damage caused by power spikes and surges with 900 joules of surge protection and a functional power reset timer.

The CSP100R programmable delay timer detects under-voltages or over-voltages. Once triggered, a programmed reset will occur within 15, 30, or 180 seconds, to keep cleaner power flowing to connected equipment without the need for a complete reset. With a limited lifetime warranty, you can trust CyberPower's commitment to the quality of the CSP100R.

## TYPICAL APPLICATIONS

- Appliances

## FEATURES

- Surge Protection
- Selectable Delay Timer
- Reset Button
- Wall Tap Plug
- Impact-Resistant Casing

## SPECIFICATIONS

INPUT	
Voltage	125 V
Plug Type	NEMA 5-15P
OUTPUT	
Outlet Type	NEMA 5-15R
Oulets - Total	1
SURGE PROTECTION	
Surge Supression	900 joules
Maximum Surge Current	22,500 amps
Maximum Surge Current H-N	7,500 amps
Maximum Surge Current H-G	7,500 amps
Maximum Surge Current N-G	7,500 amps

APPLIANCE RESET SETTINGS	
Delay Timer Settings	15 seconds, 30 seconds, and 180 seconds
INDICATORS	
Indicators	1 LED protected status indicator
CERTIFICATIONS	
Safety	NOM
cUL	
Environmental	RoHS Compliant
WARRANTY	
Product Warranty	Limited Lifetime