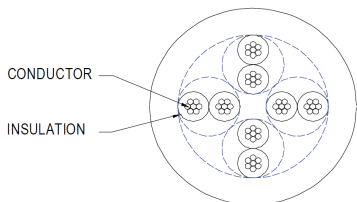



CyberPower®

SIZE: {{{(7/0.20BC)*4P}*1C+[(21/0.18BC)*2C+Paper]*2F			DRAWING NO.	S-20150121001
CONDUCTOR	SIZE	24AWG*4P	20AWG*2C	
	MATERIAL	STRANDED, BARE COPPER WIRE	STRANDED, BARE COPPER WIRE	
	CONSTRUCTION	7/0.20±0.008mm	21/0.18±0.008mm	
	CONDUCTOR DIAMETER	0.60mm Ref	0.950mm Ref	
INSULATION	MATERIAL	HD-PE	SR-PVC	
	MIN AVERAGE THICKNESS	0.150mm Ref	0.275mm Ref	
	DIAMETER	0.95±0.05mm	1.60±0.10mm	
	COLOR	BROWN&WHITE/BROWN ORANGE&WHITE/ORANGE GREEN&WHITE/GREEN BULE&WHITE/BULE	RED、BLACK	
SHIELD	MATERIAL	/	PAPER	
JACKET	MATERIAL	PVC		
	MIN AVERAGE THICKNESS	0.50mm*0.75mm Ref		
	DIAMETER	5.50±0.20mm*5.50±0.20mm		
	COLOR	BLACK		
MARKING: E124763-D 兄 AWM 2725 80℃ 30V VW-1 CYBERPOWER Outdoor				
CONSTRUCTION:				
 CONDUCTOR INSULATION  CONDUCTOR INSULATION PAPER JACKET  MARKING				