


# OL3000RTXL2U RUNTIME

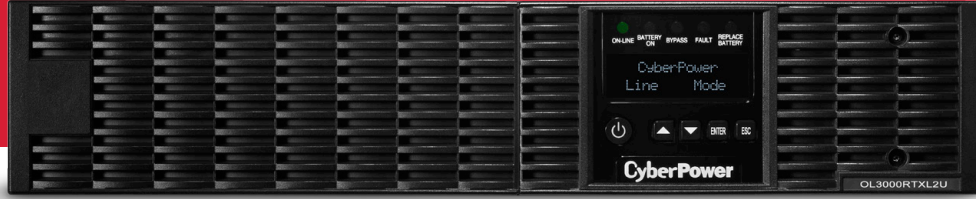

## FEATURES

- 3000VA / 2700W Pure Sine Wave UPS
- Double-Conversion Topology
- Smart Battery Management that extends life and reduces heat
- GreenPower UPS™ ECO Mode improves efficiency
- 2U Rack Mount / Tower Convertible
- Extendable LCD panel
- Remote Management Options
- 7 Outlets / USB, Serial and EPO Ports
- EMI/RFI Filters
- PowerPanel® Business Edition Software

RUNTIMES IN MINUTES															
Model/Watts	50W	100W	200W	300W	400W	500W	600W	700W	800W	900W	1000W	1100W	1200W	1300W	1400W
OL3000RTXL2U	176	134	98	63	48	36	29	24	20	20	16	14	13	11	11
OL3000RTXL2U +1BP	686	488	341	206	165	132	107	94	82	77	67	57	54	46	45
OL3000RTXL2U +2BP	1191	864	624	399	317	228	174	158	141	135	121	105	100	86	84
OL3000RTXL2U +3BP	1712	1242	898	595	474	353	273	235	199	187	166	147	141	126	124
OL3000RTXL2U +4BP	2246	1630	1178	782	636	477	373	328	281	262	224	188	178	159	156
OL3000RTXL2U +5BP	2790	2024	1463	971	790	605	474	417	360	338	294	247	233	197	192
OL3000RTXL2U +6BP	3341	2424	1752	1163	946	725	578	509	440	413	359	308	292	247	241
OL3000RTXL2U +7BP	3899	2829	2045	1357	1104	846	677	603	522	490	426	365	347	299	292
OL3000RTXL2U +8BP	4463	3238	2341	1553	1264	968	775	690	605	568	495	424	403	348	340
OL3000RTXL2U +9BP	5032	3651	2639	1752	1425	1092	874	779	682	644	565	484	460	397	388
OL3000RTXL2U +10BP	5607	4068	2941	1951	1587	1217	974	867	760	717	633	546	519	447	437

RUNTIME IN MINUTES													
Model/Watts	1500W	1600W	1700W	1800W	1900W	2000W	2100W	2200W	2300W	2400W	2500W	2600W	2700W
OL3000RTXL2U	10	8.9	8.6	7.8	7.1	6.5	6.1	5.5	4.9	4.4	4	3.7	3.5
OL3000RTXL2U +1BP	39	36	35	33	31	29	27	25	23	21	19	17	16
OL3000RTXL2U +2BP	74	68	66	61	56	53	49	45	42	39	36	34	33
OL3000RTXL2U +3BP	109	100	97	91	84	79	75	69	64	59	54	51	48
OL3000RTXL2U +4BP	141	131	128	121	113	106	100	93	86	79	74	69	66
OL3000RTXL2U +5BP	169	158	154	146	137	131	125	117	108	100	93	87	84
OL3000RTXL2U +6BP	207	187	180	171	161	153	146	137	129	121	113	106	102
OL3000RTXL2U +7BP	251	226	218	202	185	175	167	157	147	138	130	124	120
OL3000RTXL2U +8BP	297	268	258	239	219	204	191	176	165	156	146	140	135
OL3000RTXL2U +9BP	339	310	300	278	255	238	222	203	185	172	162	155	149
OL3000RTXL2U +10BP	382	349	338	316	291	272	255	232	212	194	178	170	164